

Image Reconstruction

Parallel Imaging

M229 Advanced Topics in MRI

Kyung Sung, Ph.D.

5/16/2024

Fourier Transform Symmetry

$$F(f) = \int_{-\infty}^{\infty} f_e(x) \cos(2\pi x f) dx - j \int_{-\infty}^{\infty} f_o(x) \sin(2\pi x f) dx$$

$$F(f) = F_e(f) + F_o(f)$$

real & even function?

real & odd function?

even function?

odd function?

Today's Topics

- Multicoil reconstruction
- Parallel imaging
 - Image domain methods:
 - SENSE
 - k-space domain methods:
 - SMASH
 - GRAPPA


Multi-coil Arrays

Coil 1

Coil 2


Coil 3

Coil 4

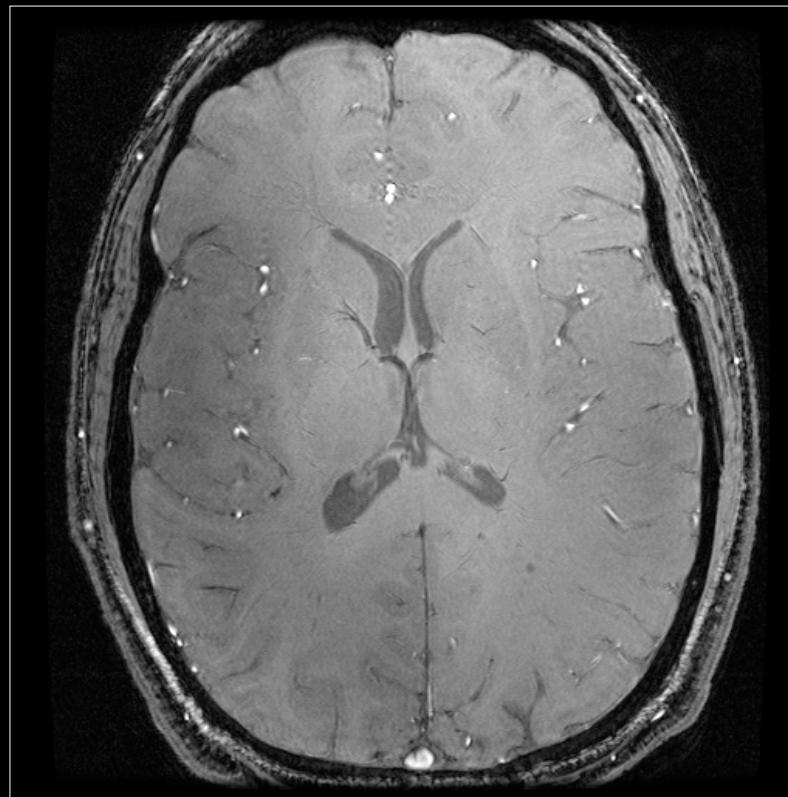

Multi-coil Sensitivity

$$\| \vec{B}(\vec{r}) \|$$

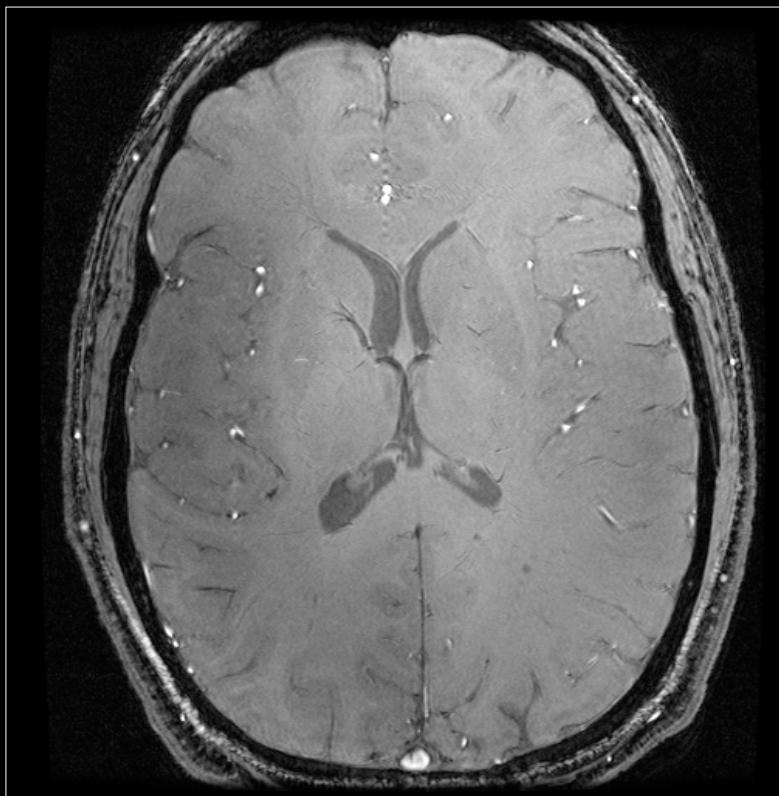

Multi-coil Reconstruction

- Each coil has a complete image of whole FOV and an amplitude and phase sensitivity

$$C_l(\vec{x}) \quad l = 1, 2, \dots, L$$


- Coils are coupled, so noise is correlated

$$E[n_i n_j] = \Psi$$





- Received data from coil l :

$$m_l(\vec{x}) = C_l(\vec{x})m(\vec{x}) + n_l(\vec{x})$$

- Given $m_l(x)$, how do we reconstruct $m(x)$?

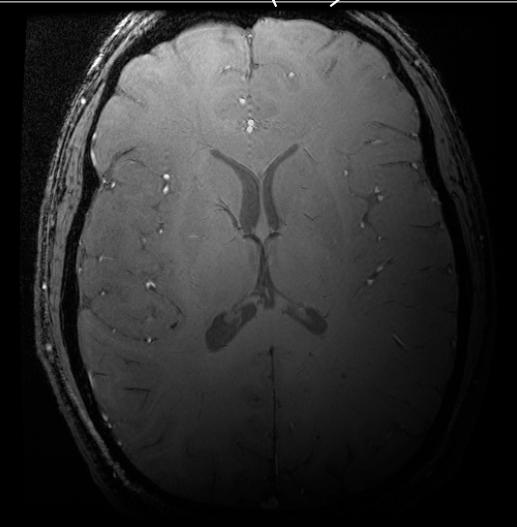$m_1(x)$ 

Multi-coil Images

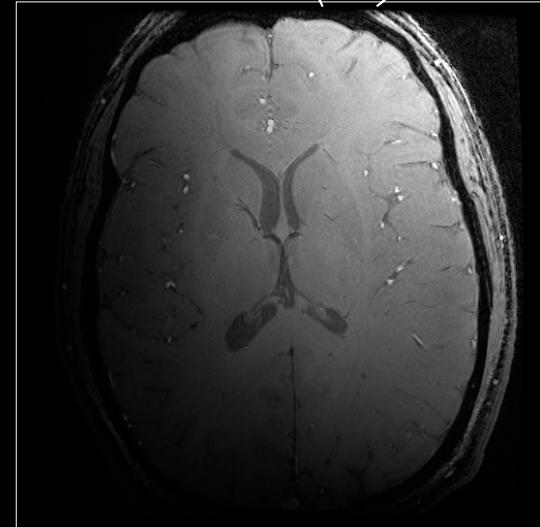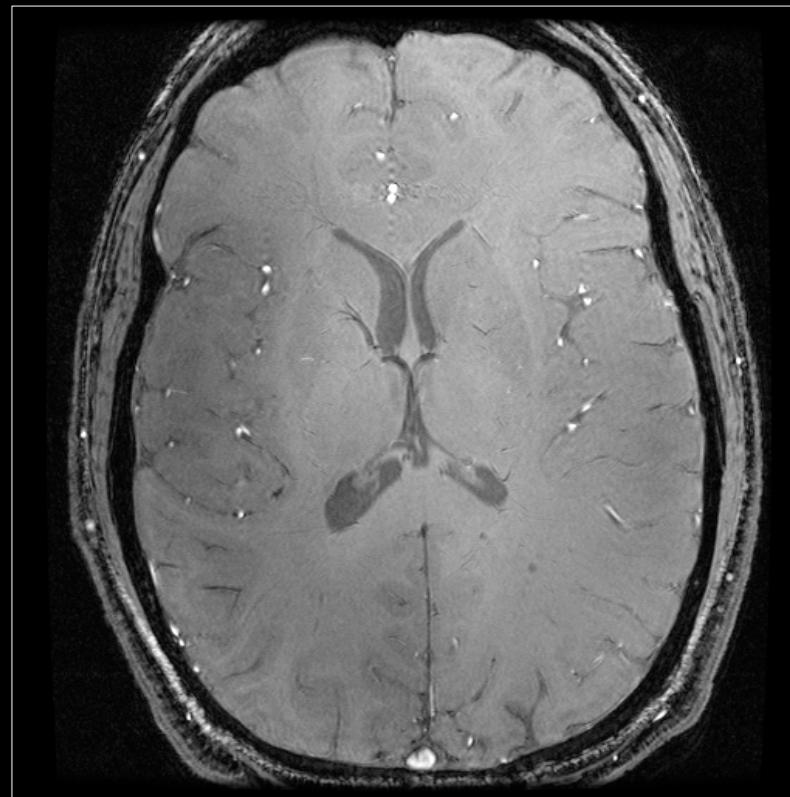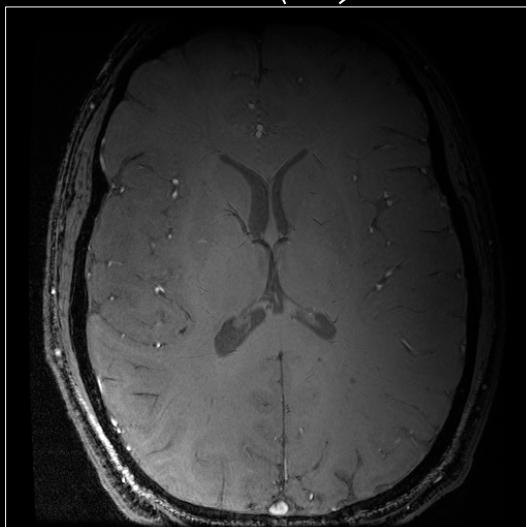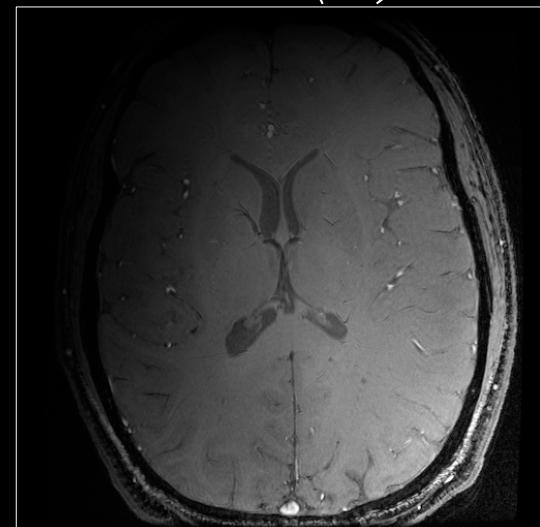 $m_2(x)$  $m_s(x)$  $m_3(x)$  $m_4(x)$ 

Multi-coil Reconstruction

For a particular voxel \mathbf{x}

$$\begin{pmatrix} m_1(\vec{x}) \\ m_2(\vec{x}) \\ \vdots \\ \vdots \\ m_L(\vec{x}) \end{pmatrix} = \begin{pmatrix} C_1(\vec{x}) \\ C_2(\vec{x}) \\ \vdots \\ \vdots \\ C_L(\vec{x}) \end{pmatrix} m(\vec{x}) + \begin{pmatrix} n_1(\vec{x}) \\ n_2(\vec{x}) \\ \vdots \\ \vdots \\ n_L(\vec{x}) \end{pmatrix}$$

OR

$$\underline{\underline{m_s(\vec{x})}} = \underline{\underline{C}} \underline{\underline{m(\vec{x})}} + \underline{\underline{n}}$$

$L \times 1 \quad L \times 1 \quad L \times 1$

Minimum Variance Estimate

$$\hat{m}(\vec{x}) = \underbrace{(C^* \Psi^{-1} C)^{-1}}_{1 \times 1} \underbrace{C^* \Psi^{-1}}_{1 \times L} \underbrace{m_s(\vec{x})}_{L \times 1}$$

Covariance (variance)

$$COV(\hat{m}(\vec{x})) = C^* \Psi^{-1} C$$

What if Ψ is $\sigma^2 I$?

$$\hat{m}(\vec{x}) = \underbrace{(C^* C)^{-1}}_{\text{Intensity Correction}} \underbrace{C^* m_s(\vec{x})}_{\text{Phase Correction}}$$

Approximate Solution

- Often we don't know $C_l(x)$, but

$$m_l(\vec{x}) = C_l(\vec{x})m(\vec{x})$$


- Approximate solution:

$$\hat{m}_{SS}(\vec{x}) = \sqrt{\sum_l m_l^*(\vec{x})m_l(\vec{x})}$$


- For SNR > 20, within 10% of optimal solution

PB Roemer et al. MRM 1990

Accelerate Imaging with Array Coils

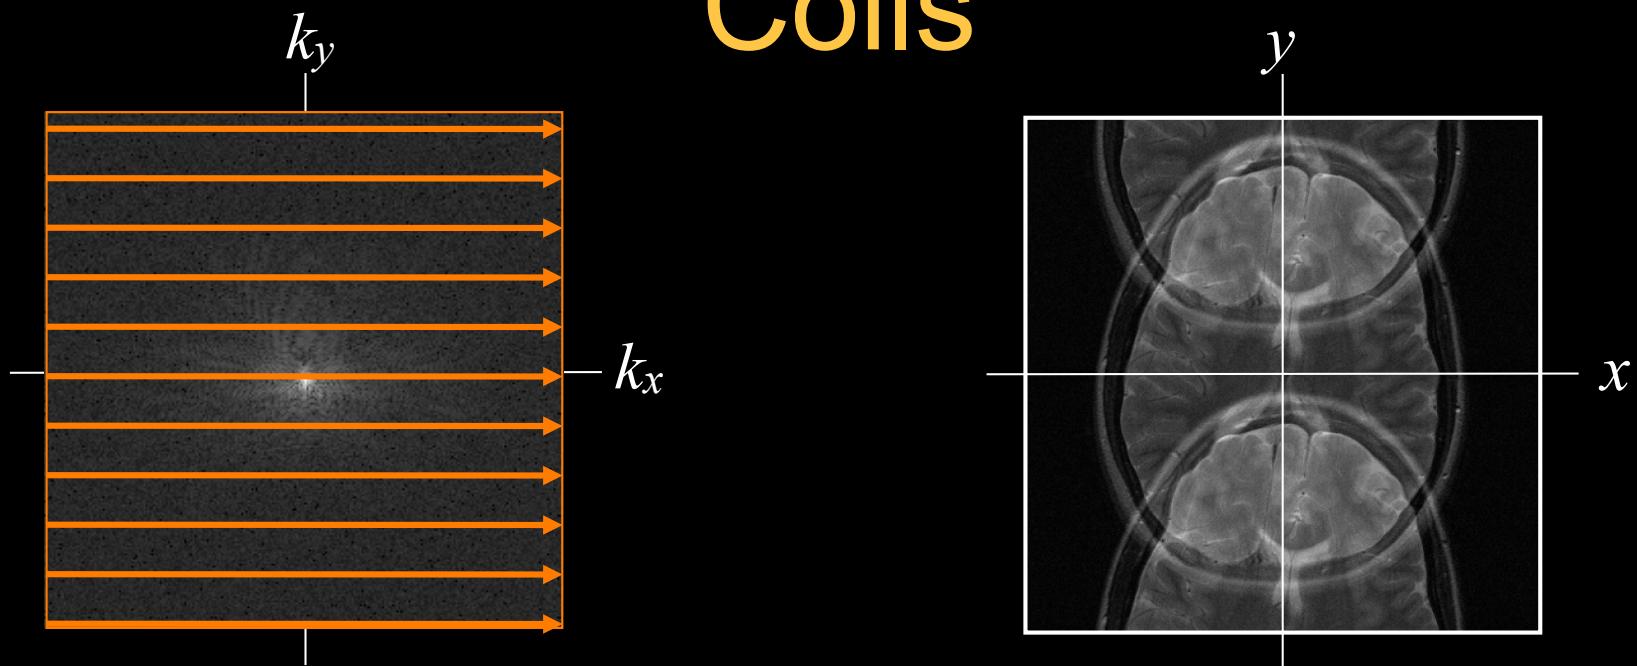

Accelerate Imaging with Array Coils

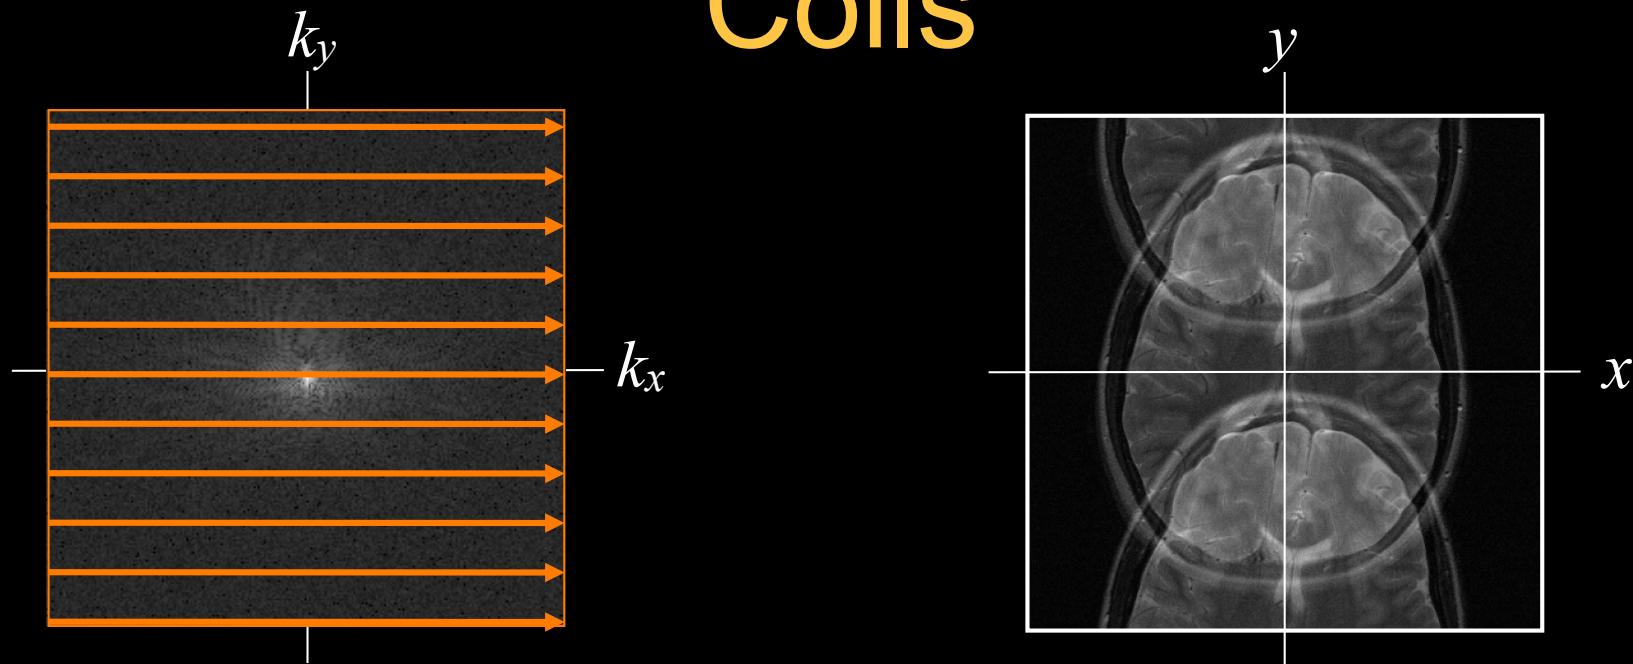

- Parallel Imaging
 - Coil elements provide some localization
 - Undersample in k-space, producing aliasing
 - Sort out in reconstruction


Parallel Imaging

- Many approaches:
 - Image domain - SENSE
 - k-space domain - SMASH, GRAPPA
 - Hybrid - ARC
- We will focus on two:
 - SENSE: optimal if you know coil sensitivities
 - GRAPPA: autocalibrating / robust


Parallel Imaging (SENSE)

Cartesian SENSE

$$m_1(\vec{x}_1) = C_1(\vec{x}_1)m(\vec{x}_1) + C_1(\vec{x}_2)m(\vec{x}_2)$$

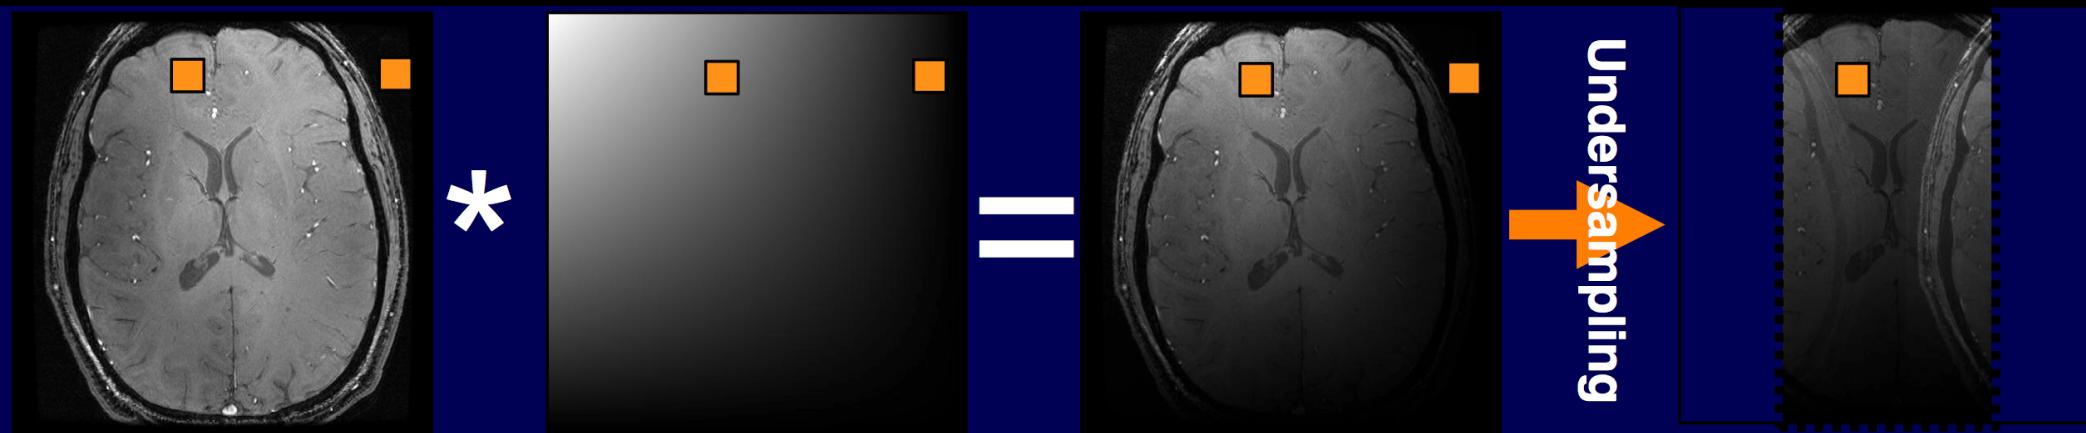

$$m_2(\vec{x}_1) = C_2(\vec{x}_1)m(\vec{x}_1) + C_2(\vec{x}_2)m(\vec{x}_2)$$

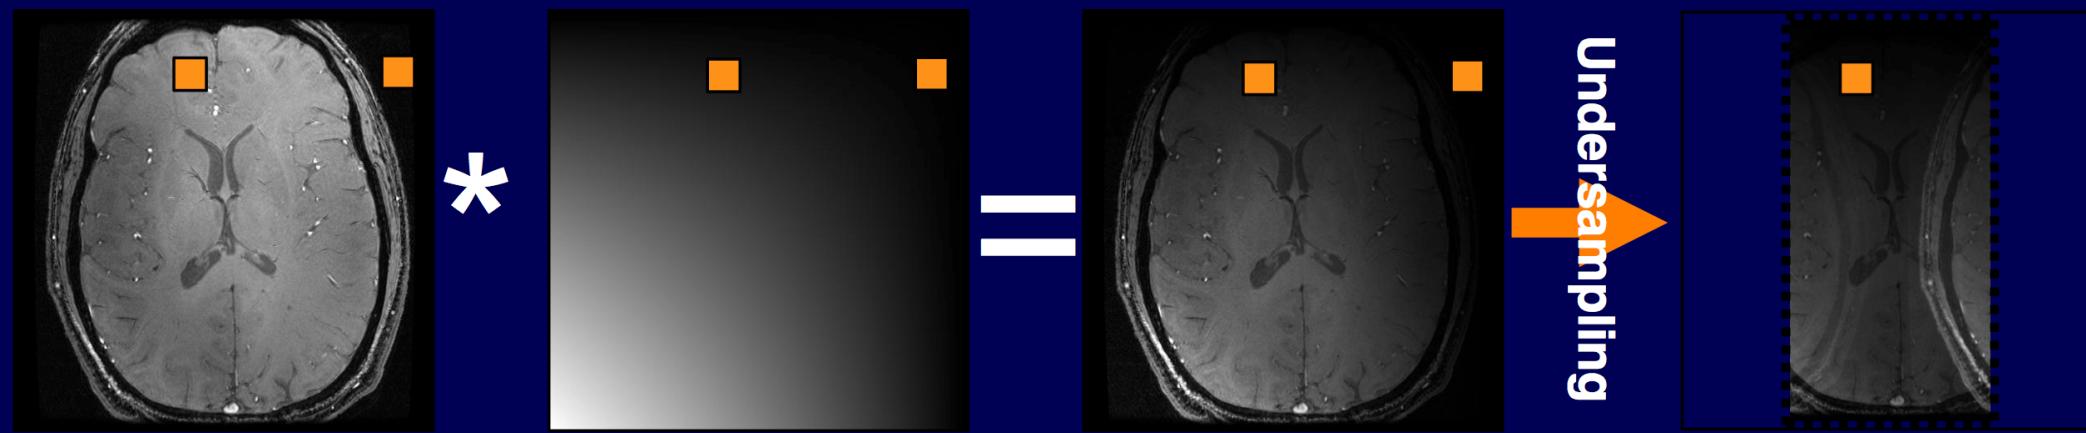

$$\begin{pmatrix} m_1(\vec{x}_1) \\ m_2(\vec{x}_1) \\ \vdots \\ \vdots \\ m_L(\vec{x}_1) \end{pmatrix} = \begin{pmatrix} C_1(\vec{x}_1) & C_1(\vec{x}_2) \\ C_2(\vec{x}_1) & C_2(\vec{x}_2) \\ \vdots & \vdots \\ \vdots & \vdots \\ C_L(\vec{x}_1) & C_L(\vec{x}_2) \end{pmatrix} \begin{pmatrix} m(\vec{x}_1) \\ m(\vec{x}_2) \end{pmatrix} + \begin{pmatrix} n_1(\vec{x}_1) \\ n_2(\vec{x}_1) \\ \vdots \\ \vdots \\ n_L(\vec{x}_1) \end{pmatrix}$$

Aliased
Images

Sensitivity at
Source Voxels

Source
Voxels

OR

$$\underline{m_s} = \underline{C}\underline{m} + \underline{n}$$

$\begin{matrix} 2 \times 1 \\ L \times 1 \quad L \times 2 \quad L \times 1 \end{matrix}$


$$\hat{m}(\vec{x}) = \frac{(C^* \Psi^{-1} C)^{-1}}{2 \times 2} \frac{C^* \Psi^{-1}}{2 \times L} \frac{m_s(\vec{x})}{L \times 1}$$

L aliased reconstruction resolves 2 image pixels

For an $N \times N$ image, we solve $(N/2 \times N)$
 2×2 inverse systems

For an acceleration factor R , we solve $(N/R \times N)$
 $R \times R$ inverse systems

SENSE Reconstruction

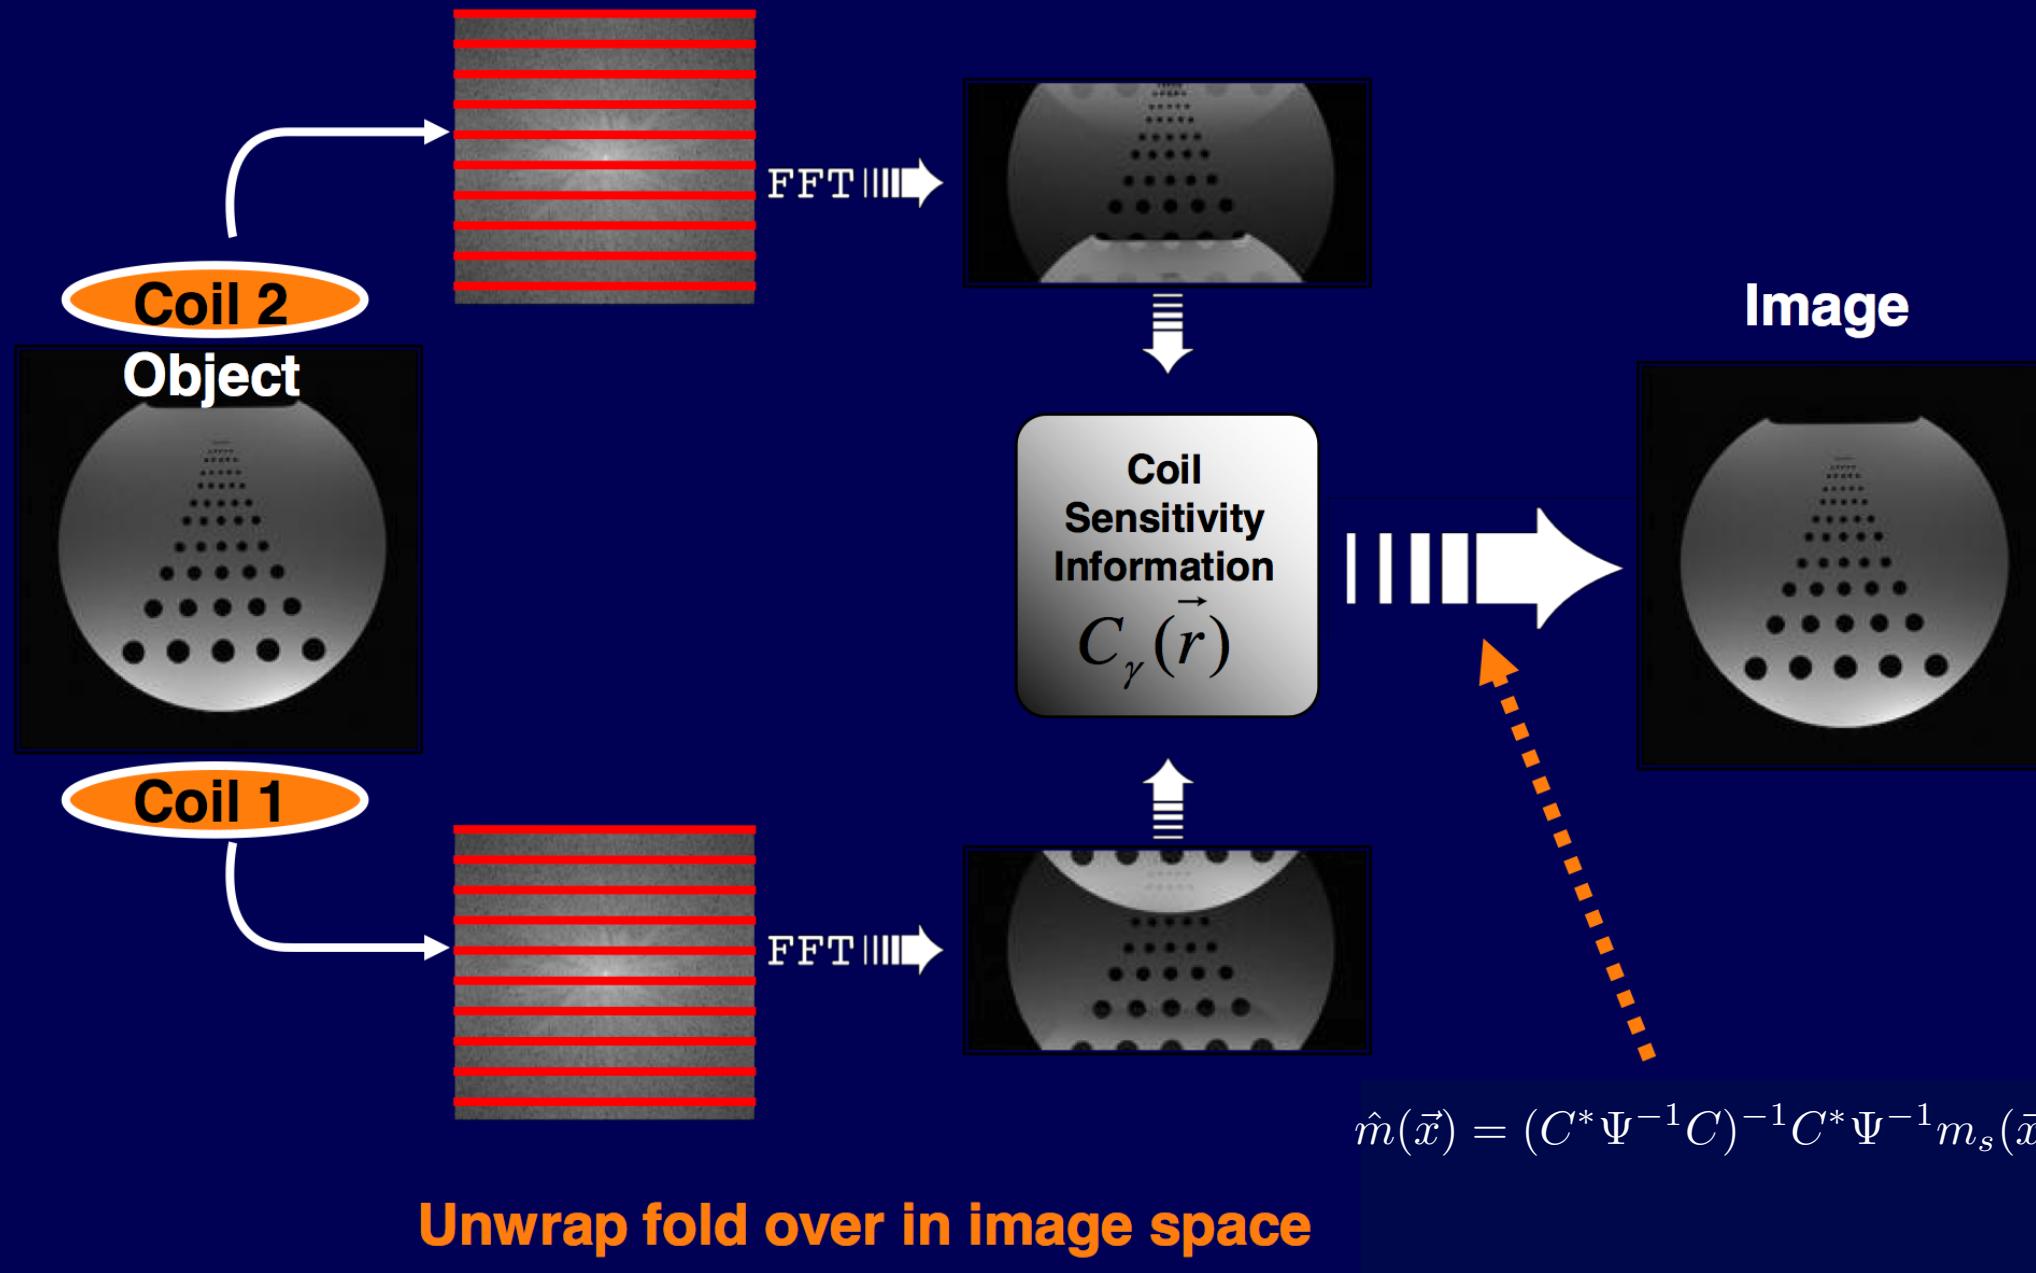

SNR Cost

- How large can R be?
- Two SNR loss mechanisms
 - Reduced scan time
 - Condition of the SENSE decomposition
- SNR Loss

$$SNR_{SENSE} = \frac{SNR}{g\sqrt{R}}$$

Geometry Reduced
Factor Scan Time

Geometry Factor

- Covariance for a fully sampled image
(variance of one voxel):

$$\chi_F = \frac{1}{n_F} (C_F^* \Psi^{-1} C_F)^{-1}$$

- Covariance for a reduced encoded image:

$$\chi_R = \frac{1}{n_R} (C_R^* \Psi^{-1} C_R)^{-1}$$




Geometry Factor


- g-factor is critical since it depends on:
 - Acceleration
 - Spatial position
 - Aliasing direction
 - Coil geometry
- Minimizing g-factor drives system design
- Sense coils are different from traditional array coils




Parallel Imaging Tradeoffs

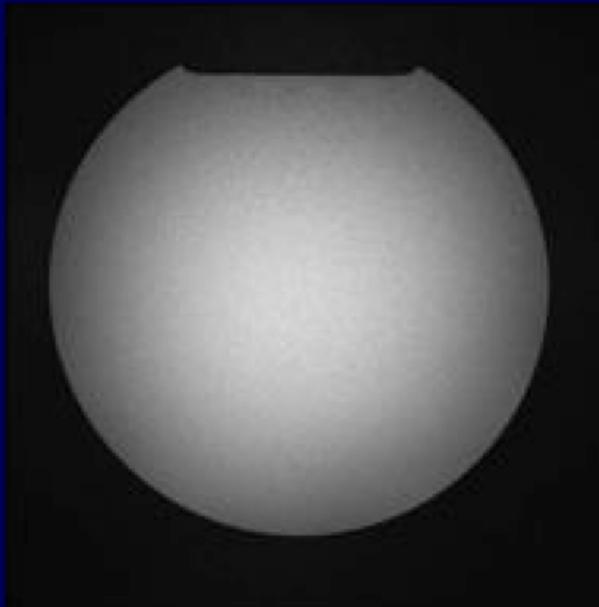

PAT x 2

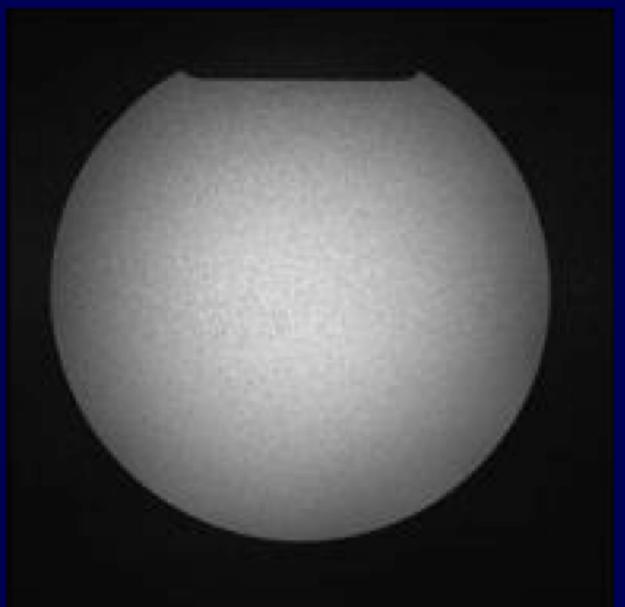

PAT x 3

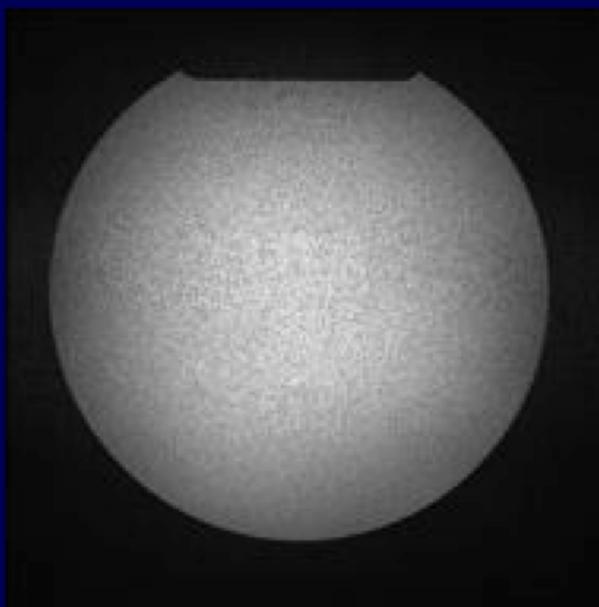


f_p = acceleration factor

g = coil geometry factor

PAT x 4


1/g-factor Map for R=4

Ultimate SNR Loss For Reduction 4

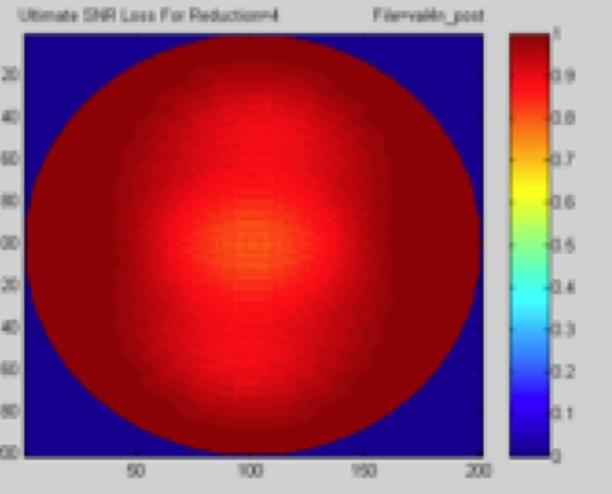


∞ elements

SNR Loss For R Factor 4x4: CWC32_32_post.mat

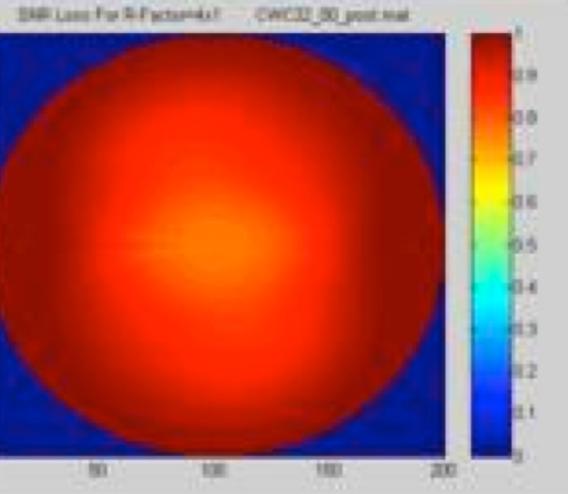


32 elements

SNR Loss For R Factor 4x4: CWC16_32_post.mat

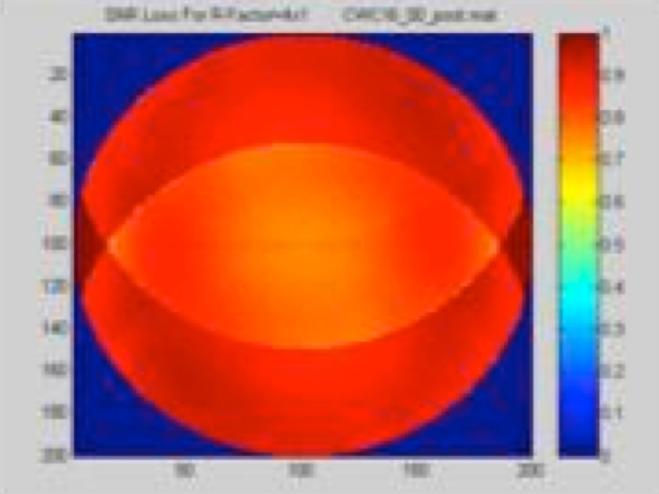


16 elements

SNR Loss For R Factor 4x4: CWC12_32_post.mat

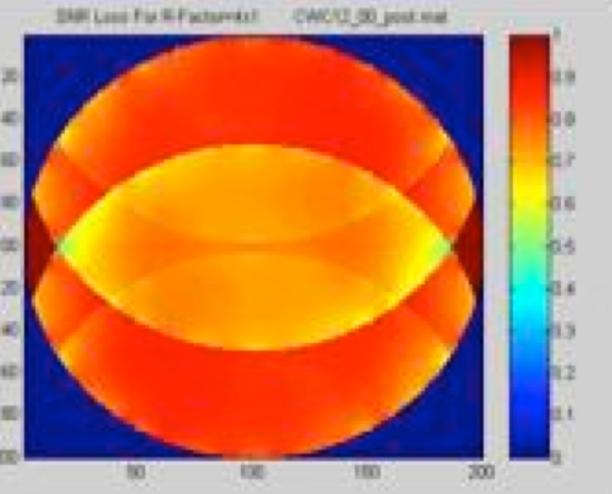

12 elements

SNR Loss For R Factor 4x4: CWC8_32_post.mat

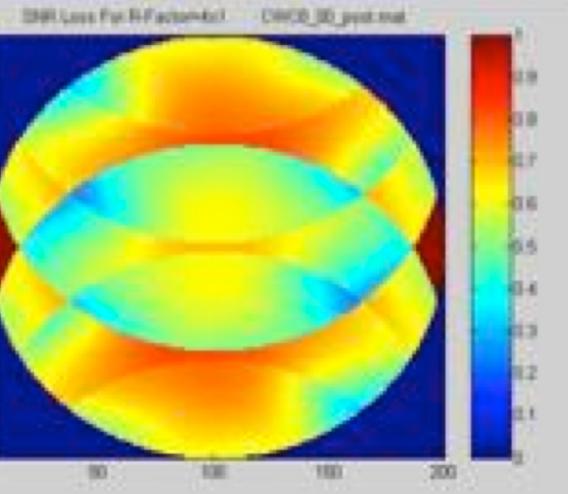

8 elements

Relative
SNR
Scale

g-factor and its impact on images

Rate 1

2

2.4


3

4


g-map



SENSE

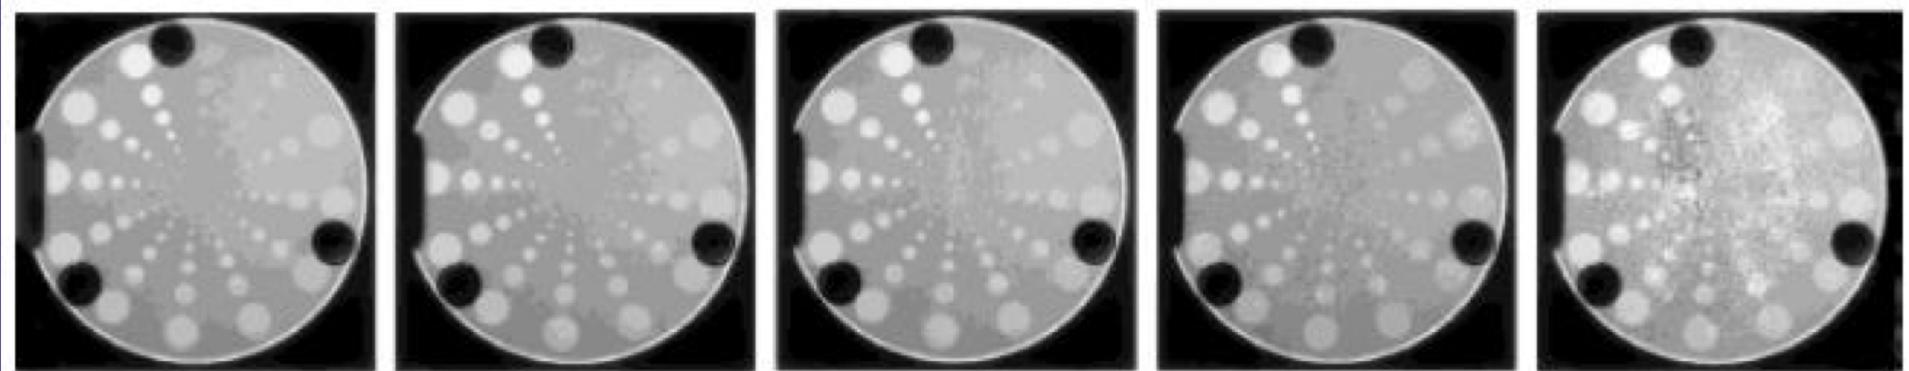


aliased

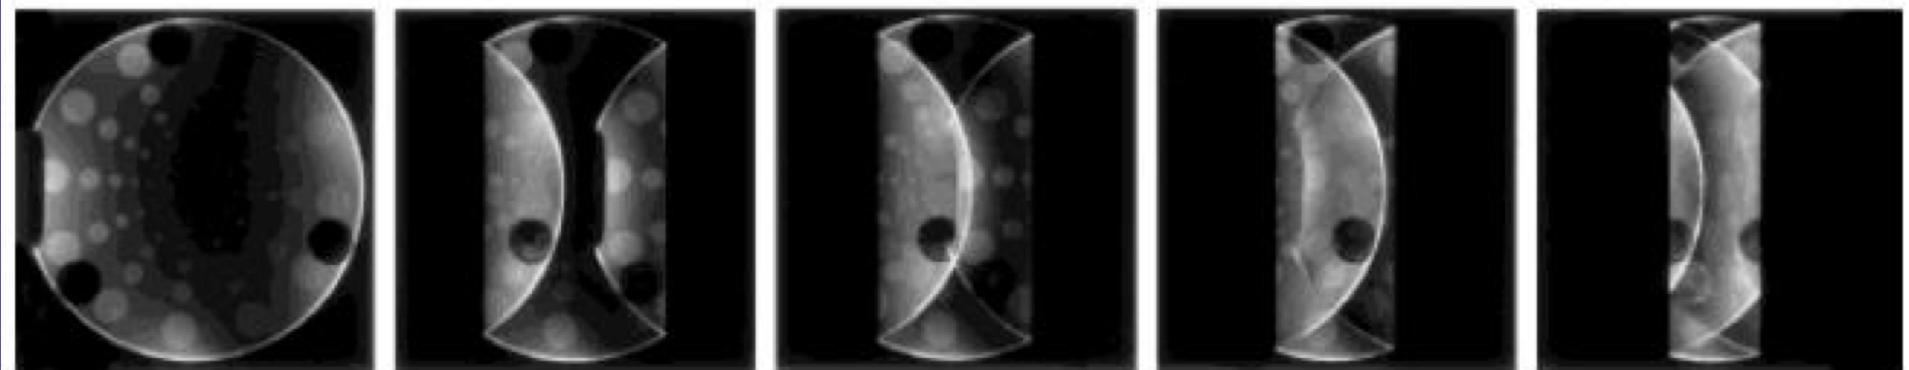

Dependence on Coil Sensitivity

- Images reconstructed using coil sensitivity maps with different order P of polynomial fitting

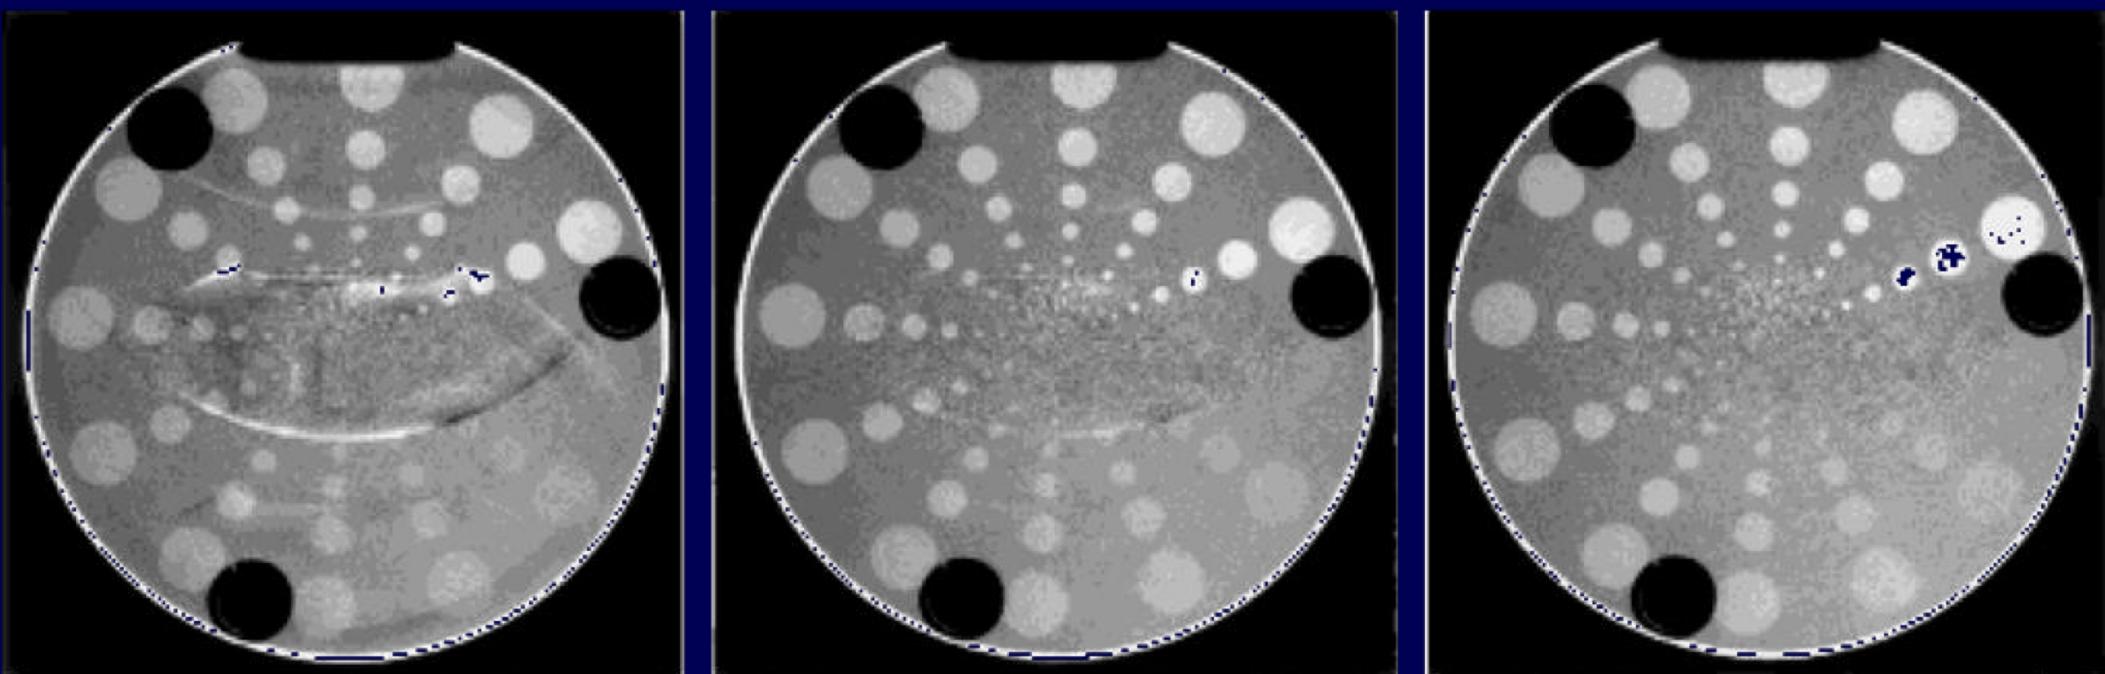

P=0


P=1

P=2


Parallel Imaging (GRAPPA)

GRAPPA

- Coil sensitivities are
 - Smooth in image space
 - Local in k-space

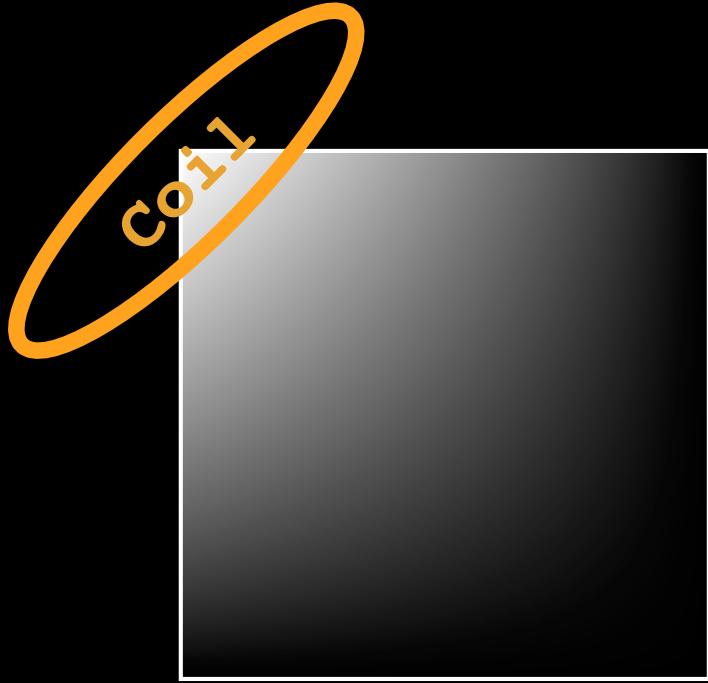


$$m(\vec{x})C_j(\vec{x})$$

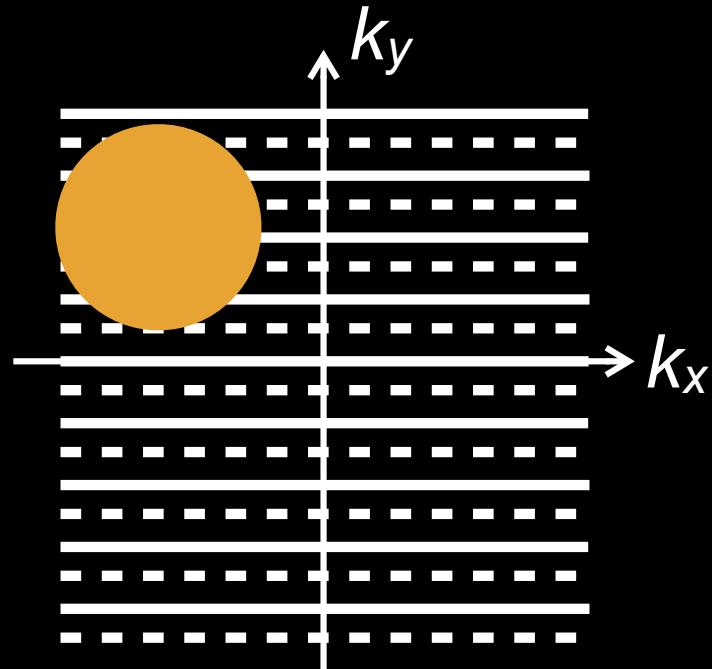

$$M(\vec{k}) * C_j(\vec{k})$$

GRAPPA

- Missing information is implicitly contained by adjacent data

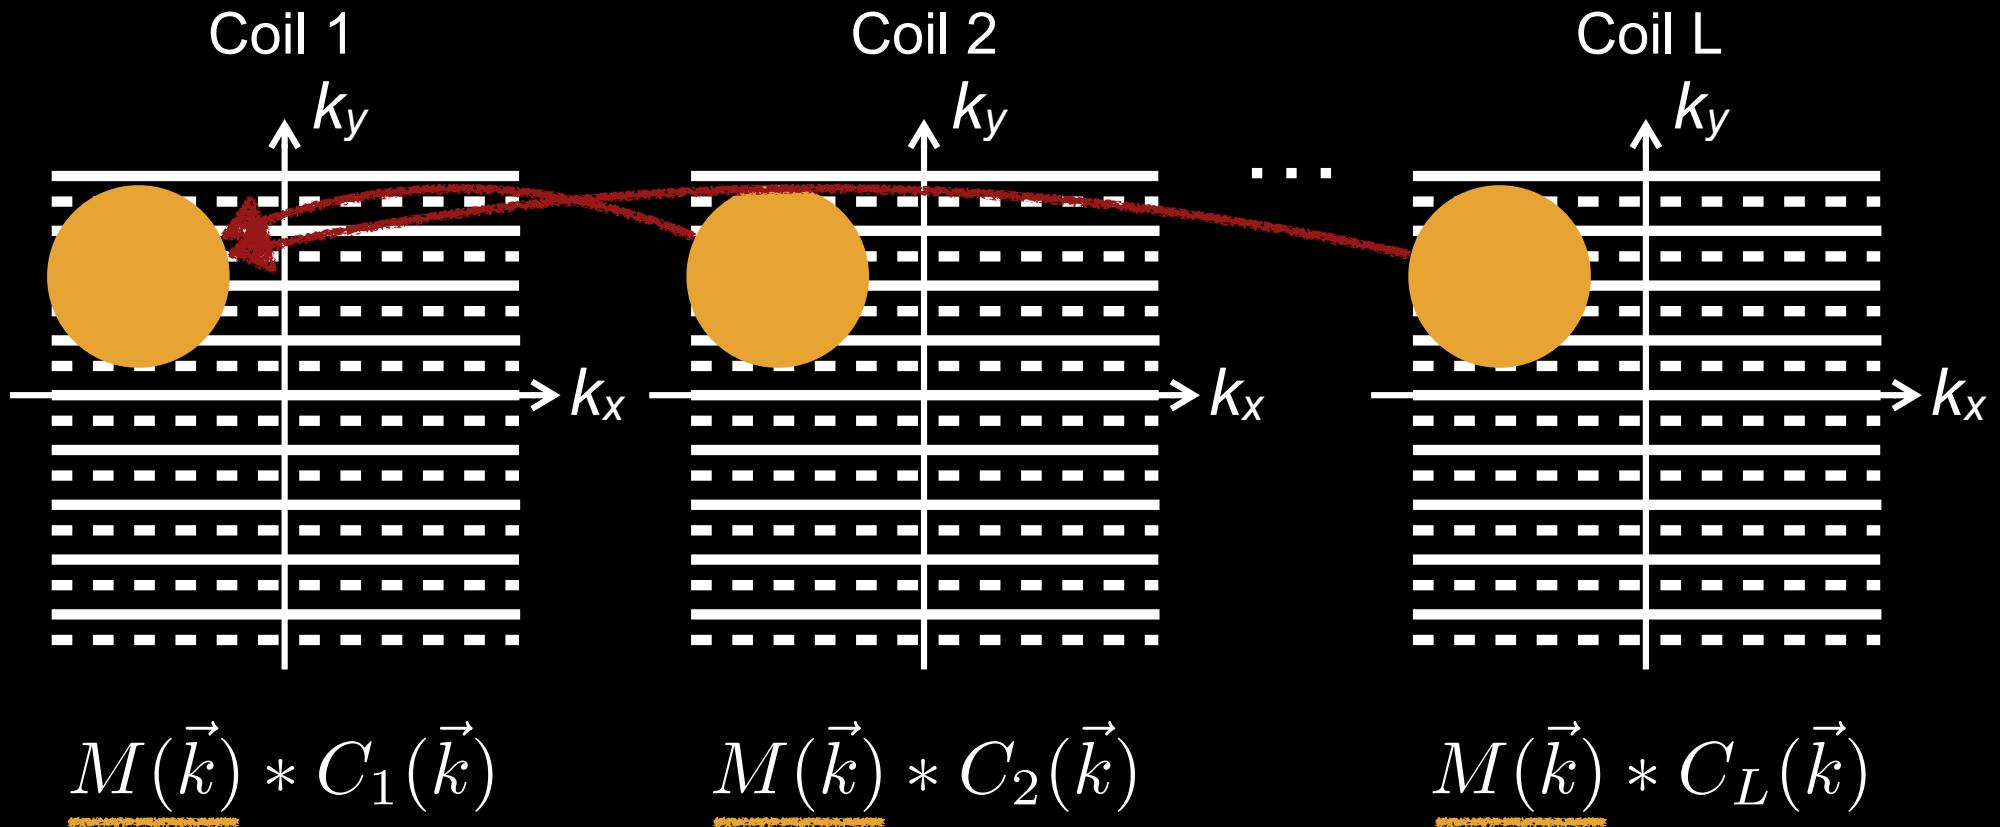

GRAPPA Reconstruction

- How do we find missing data from these samples?

$$\hat{m}_k(k_x, k_y) = \sum_{i,j,k} a_{i,j,k} \cdot m_k(k_x + i\Delta k_x, k_y + j\Delta k_y)$$


missing data
for each coil

weights

neighborhood data
for each coil


Auto-Calibration

$$\hat{m}_k(k_x, k_y) = \sum_{i,j,k} a_{i,j,k} \cdot m_k(k_x + i\Delta k_x, k_y + j\Delta k_y)$$

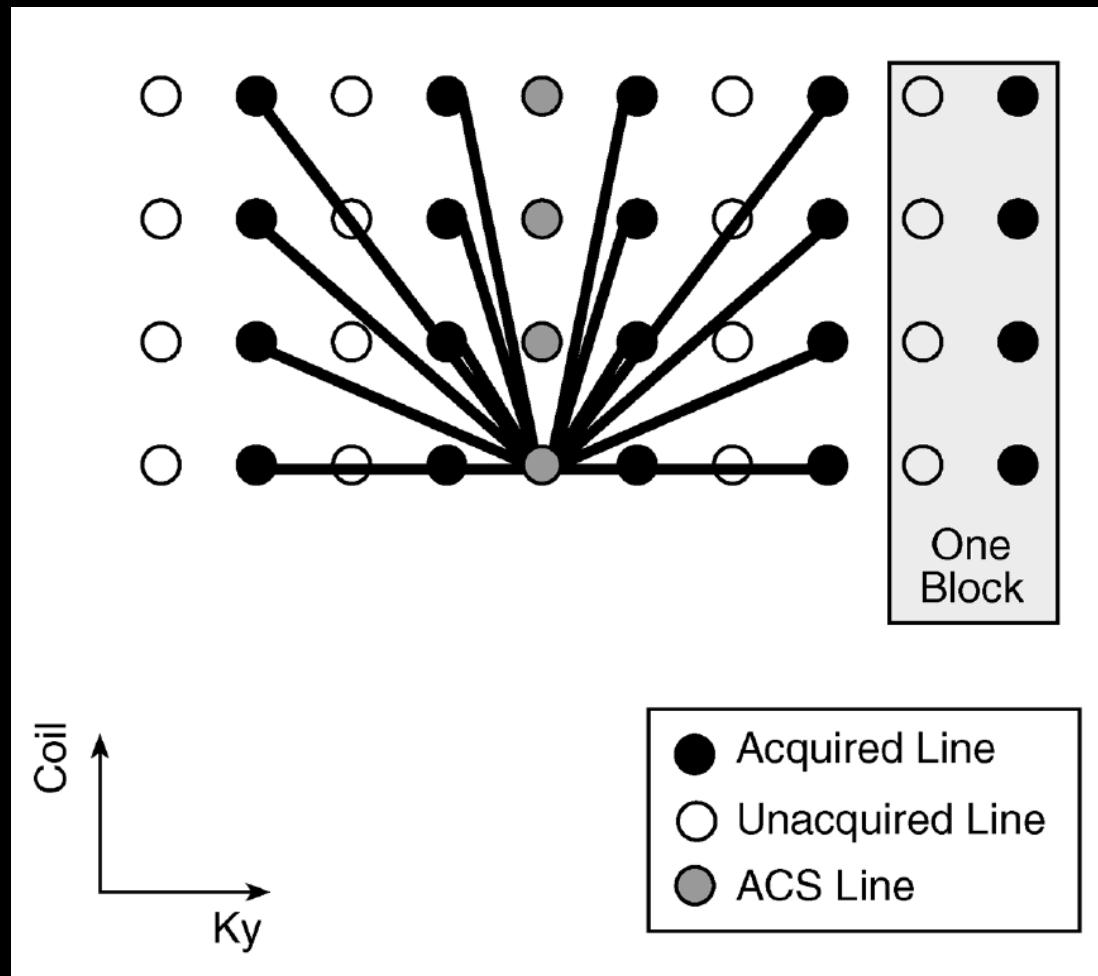

Auto-Calibration


- Assume there is a fully sampled region
- We have samples of what the GRAPPA synthesis equations should produce

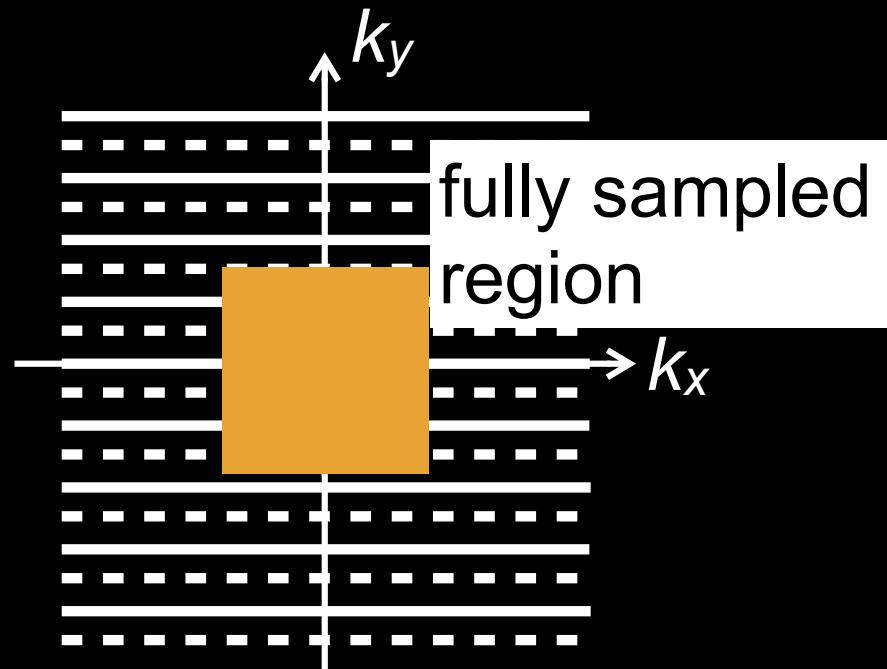

- Invert this to solve for GRAPPA weights

Auto-Calibration

- Calibration area has to be larger than the GRAPPA kernel
- Each shift of kernel gives another equation

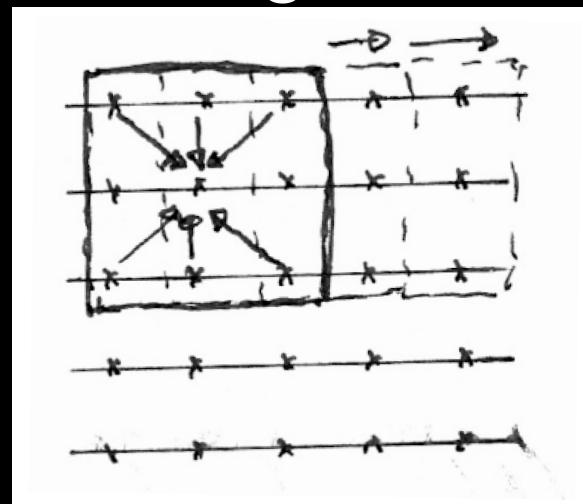

- Here, 3x3 kernel, 5x5 calibration area gives 9 equations

Auto-Calibration

$$\hat{m}_k(k_x, k_y) = \sum_{i,j,k} a_{i,j,k} \cdot m_k(k_x + i\Delta k_x, k_y + j\Delta k_y)$$

- Write as a matrix equation


$$\frac{\underline{M}_{k,c}}{\begin{array}{c} \text{Calibration} \\ \text{Data} \end{array}} = \frac{\underline{M}_A \cdot \underline{a}_k}{\begin{array}{c} \text{Neighborhood} \\ \text{Data} \end{array}}$$

GRAPPA
Coefficients

- GRAPPA weights are:


$$a_k = (M_A^* M_A + \lambda I)^{-1} M_A^* M_{k,c}$$

GRAPPA - Synthesis

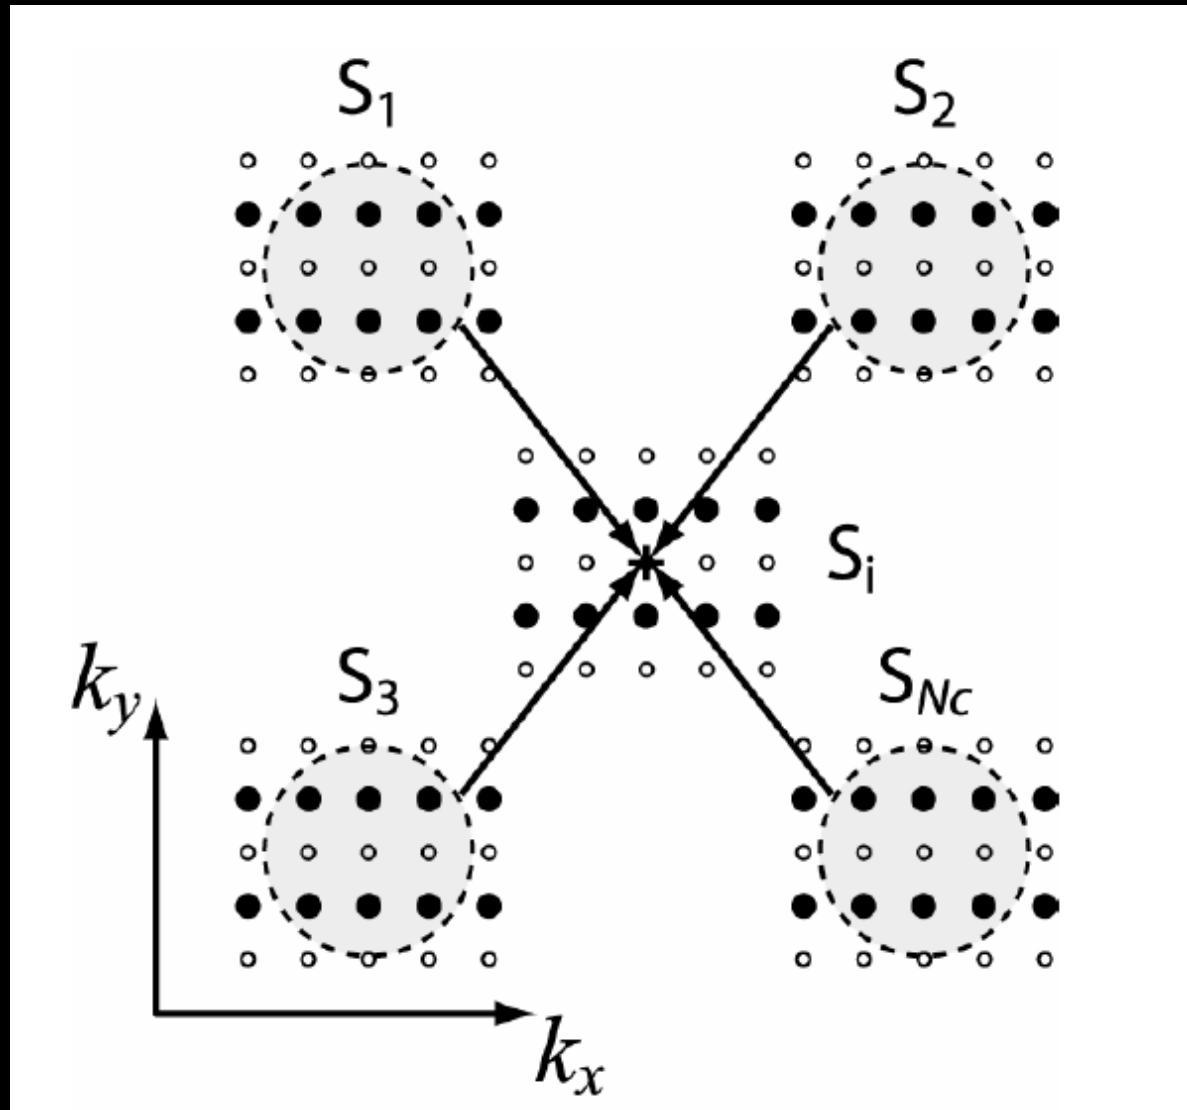

Auto-Calibration Parallel Imaging

coil = 1

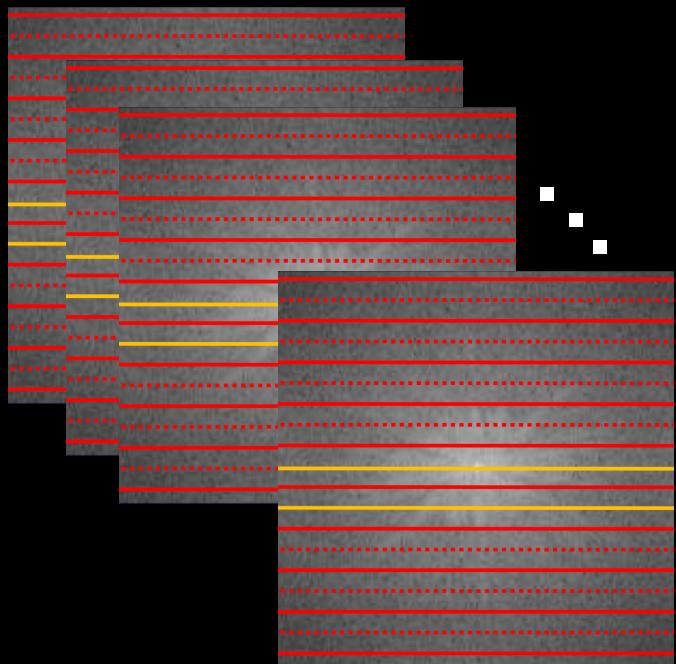

ACS (Auto-Calibration Signal) lines


$$\sum_{l=1}^L S_l^{ACS}(k_y - m\Delta k_y) = \sum_{l=1}^L n(l, m)S_l(k_y)$$

GRAPPA formula to reconstruct signal
in one channel

$$S_j(k_y - m\Delta k_y) = \sum_{l=1}^L \sum_{b=0}^{N_b-1} n(j, b, l, m)S_l(k_y - bA\Delta k_y)$$

A: Acceleration factor
n(j,b,l,m): GRAPPA weights

GRAPPA Reconstruction

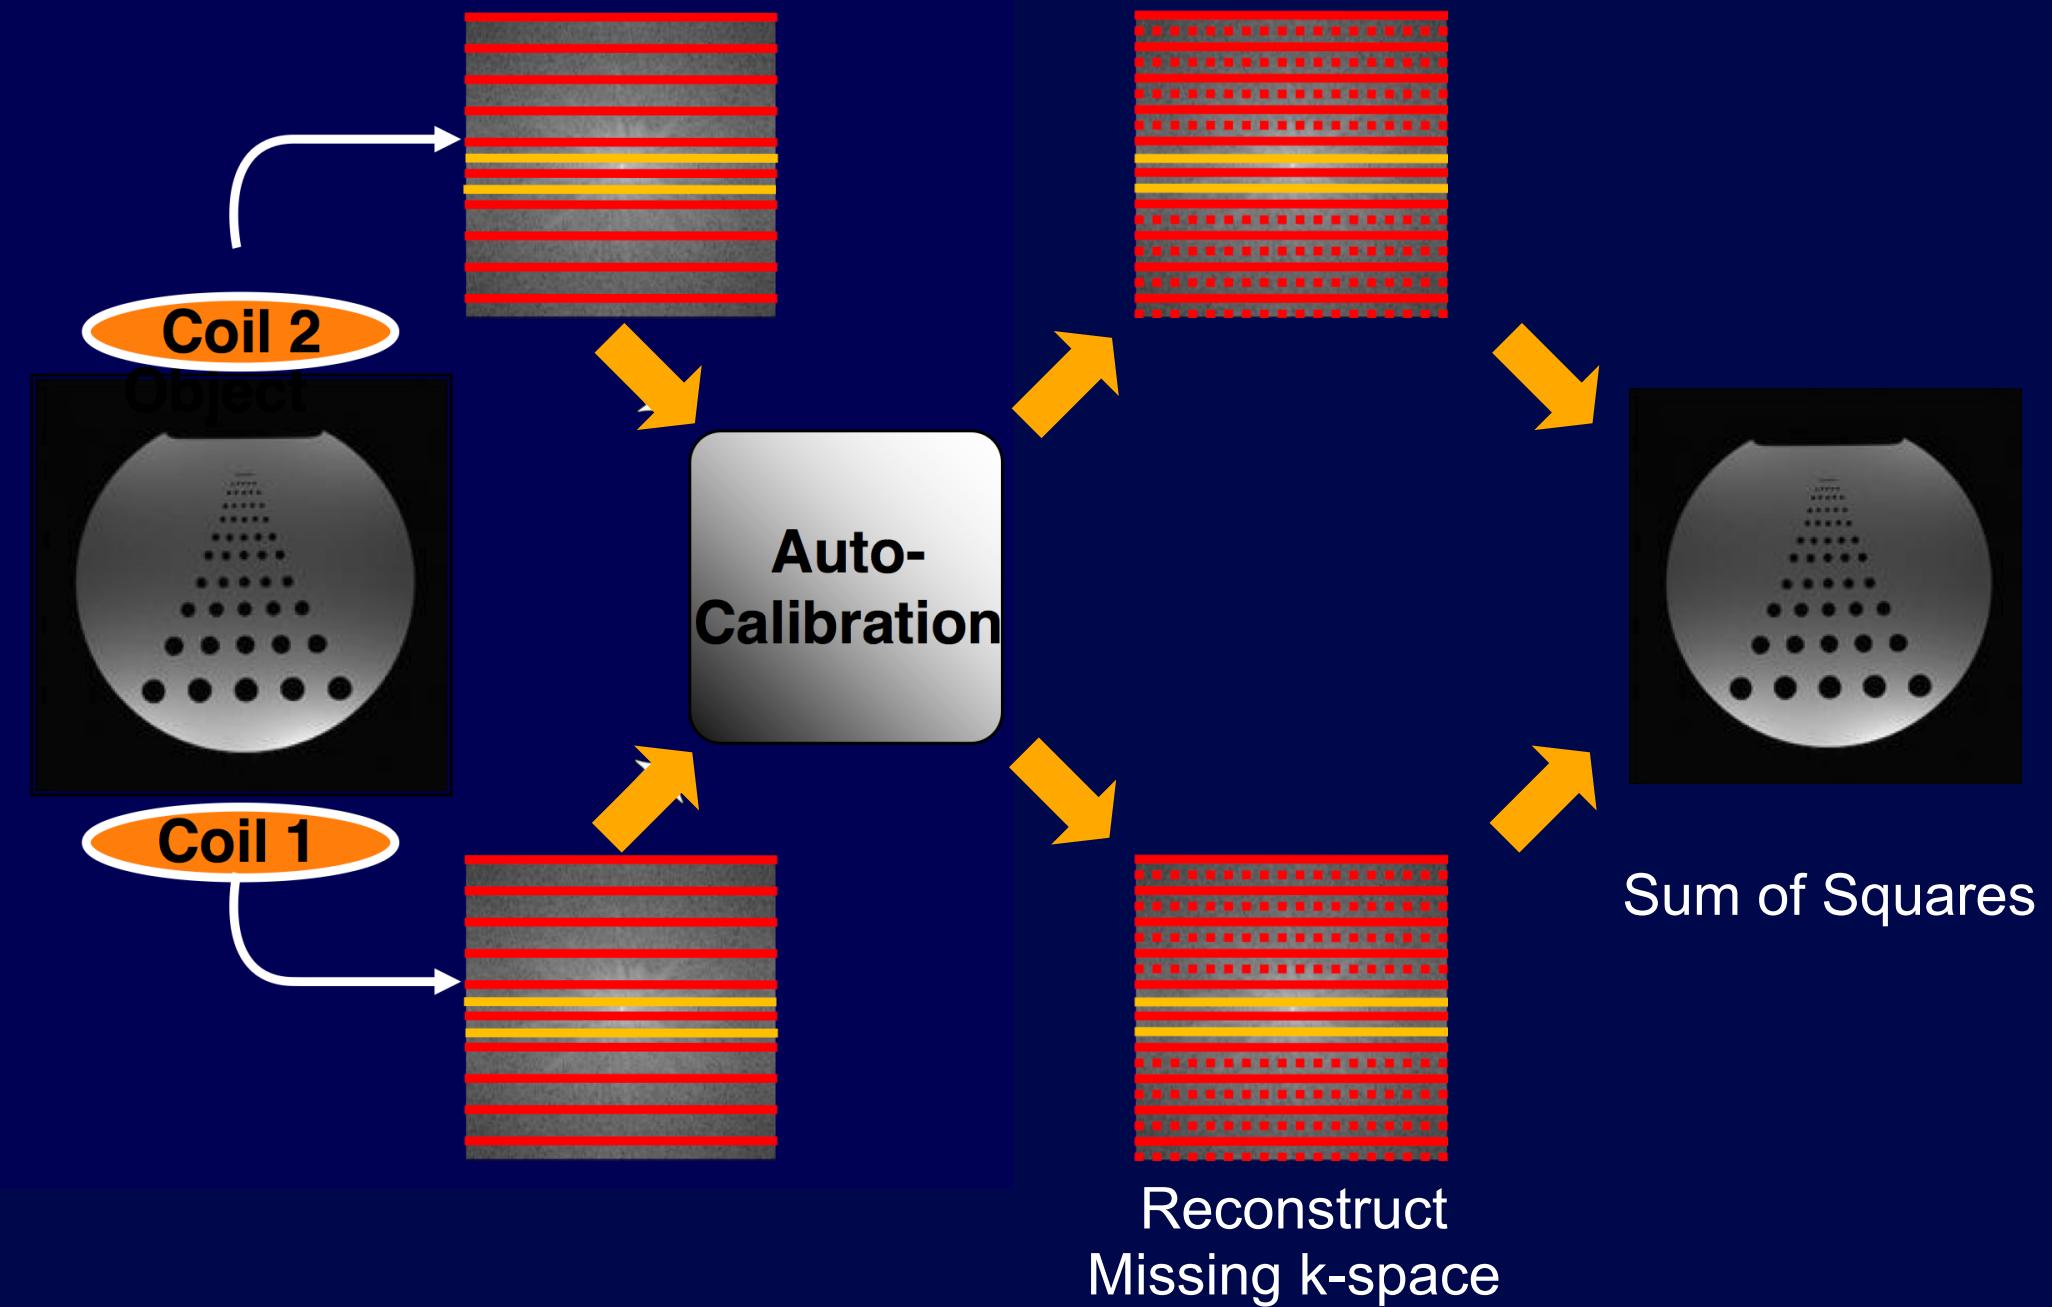


GRAPPA

- Compute GRAPPA weights from calibration region
- Compute missing k-space data using the GRAPPA weights
- Reconstruct individual coil images
- Combine coil images

Considerations of GRAPPA

- Calibration region size
- GRAPPA kernel size
- Sample geometry dependence

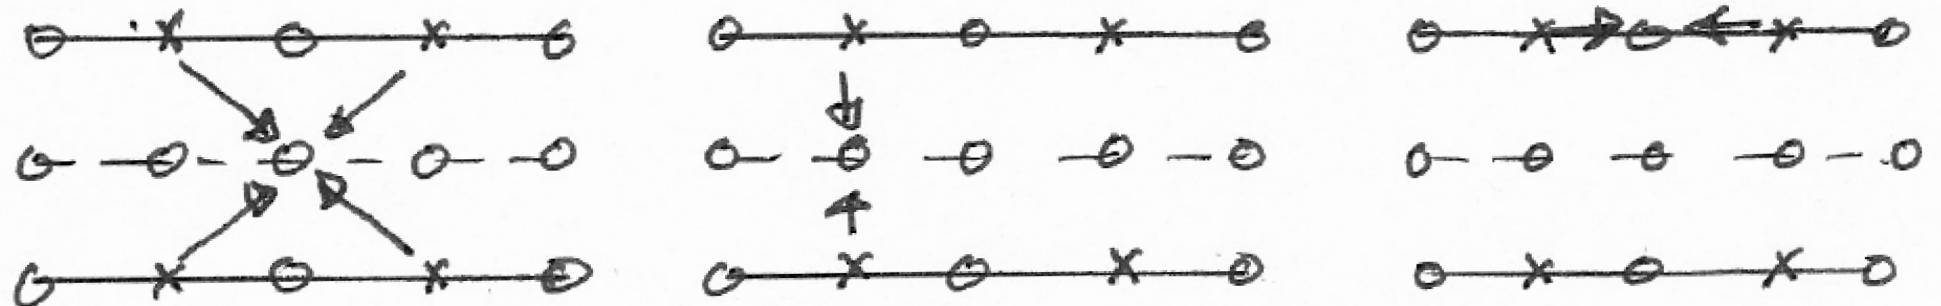

GRAPPA

- Compute GRAPPA weights from calibration region
- Compute missing k-space data using the GRAPPA weights
- Reconstruct individual coil images
- Combine coil images

Summary

- Parallel imaging utilizes coil sensitivities to increase the speed of MRI
- Cases for parallel imaging
 - Higher patient throughput,
 - Real-time imaging/Interventional imaging
 - Motion suppression
- Cases against parallel imaging
 - SNR starving applications

Summary

- Many approaches:
 - Image domain - SENSE
 - k-space domain - SMASH, GRAPPA
 - Hybrid - ARC
- We will focus on two:
 - SENSE: optimal if you know coil sensitivities
 - GRAPPA: autocalibrating / robust

Further Reading

- Multi-coil Reconstruction
 - <http://onlinelibrary.wiley.com/doi/10.1002/mrm.1910160203/abstract>
- SENSE
 - <http://www.ncbi.nlm.nih.gov/pubmed/10542355>
- SMASH
 - <http://www.ncbi.nlm.nih.gov/pubmed/9324327>
- Parallel Imaging Overview
 - <http://www.ncbi.nlm.nih.gov/pubmed/17374908>

Thanks!

Kyung Sung, PhD

ksung@mednet.ucla.edu

<https://mrri.ucla.edu/sunlab/>